


1/4" Color CCIQ II Camera





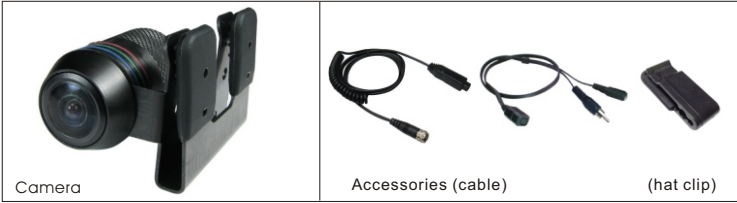


Camera

Accessories (cable)

(hat clip)

Instruction Drawing & Description

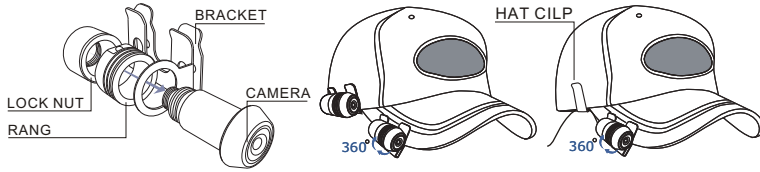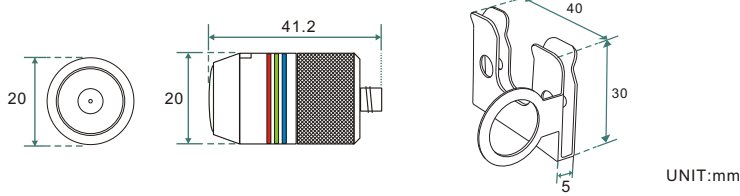

Specification CB18W 512-756-1678

Image Sensor	1/4" Color CCIQ II Camera
Video System	NTSC / PAL
Number Of Effective Pixels	648 x 488 (NTSC & PAL)
Scanning System	2:1 INTERLACE
Synchronization	INTERNAL
Resolution (TV Lines)	400TV Lines
S/N Ratio	MORE THAN 50dB
Minimum Illumination	0.1Lux at F1.2
Image Transfer Rate	60 fps
Horizontal Sync Frequency	15.734kHz(NTSC) / 15.625kHz(PAL)
Vertical Sync Frequency	60Hz(NTSC) / 50Hz(PAL)
Gamma Consumption	0.45
Video Output	1Vp-p , 75ohms Composite
Built-In Lens	1.8mm/F2.5
Storage Temperature	-30 to 60 Degree C
Working Temperature	-10 to 45 Degree C
Power Supply	DC 5~12V
Power Current	50mA(max.)
Dimensions(WxH)	(D) 20 mm

