

Ultra High Resolution HD720 NETWORK CAMERA

The Perfect Addition to Any CCTV System

CD13VIP FIXED VANDAL-PROOF CAMERA



1-512-756-1678

➤ The CD13VIP network cameras offer advanced IP features and performance with Full-HD resolution real-time H.264 .




➤ Key Features

- HD 720p Resolution Supported
- 2DNR (2 Dimensional Noise Reduction)
- Day & Night (IR Cut Filter)
- ONVIF Supported
- BLC (Back Light Compensation)
- Two-way Audio
- Micro SD Supported
- Multiple Compression (H.264, MPEG4, MJPEG)
- Dual Streaming
- Cross Web-Browsing
- Motion Adaptive Transmission
- Dynamic Adjustable Bit Rate
- Event Buffering
- FTP Image Upload
- Web Casting
- Password Protection, IP Filtering
- DDNS Supported
- Auto Exposure (AE)
- Auto White Balance (AWB)
- Privacy Masking
- Pre-recorded Voice Alert
- IP66

➤ Dimensions

Unit: mm

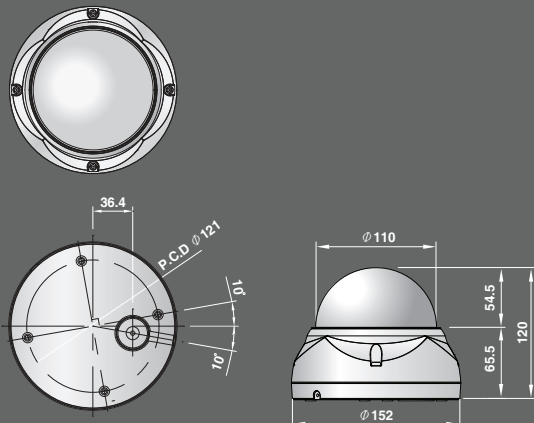

➤ Technical Specification

Model	CD13VIP
IMAGE	
Image Sensor	1/2.7" CMOS
Lens	Megapixel 3~9mm Vari-focal F1.2(Tamron)
Scanning Mode	Progressive Scan
Min. Illumination	Color: 2.5Lux, B/W: 0.2Lux(F1.2, 50IRE)
AE/AWB	Yes
DNR	2DNR
D&N	True D&N (IR-cut filter)
WDR	No
DIS	No
BLC	BLC
VIDEO	
Video Out	1 BNC (Max. D1 for installation)
Progressive Encoding	Yes
Compression	H.264(BP/MP/HP), MPEG4(ASP/SP), MJPEG
Resolution Supported	720p, D1, Half-D1, VGA, QVGA, CIF
Frame Rate	30fps @ H.264 720p + 30fps @ MJPEG 720p
Multiple Streaming	Dual
IN/OUT	
Audio In/Out	In x 1/Out x 1 (G.711)
Alarm In/Out	In x 1 /Out x 1
RS485	No
Ethernet	10/100Mbps
Local Storage	Micro SD
FEATURE	
Motion Detection	Yes (Total 16 Include/Exclude windows)
Event Buffering (Pre & Post)	Yes (10s/180s)
Privacy Masking	Yes (8 windows)
PrVA(Pre-recorded Voice Alert)	Yes (3 files)
Video Analytics	No
Cross Web Browser	Safari, Firefox, Google Chrome
FTP Image Upload	Yes
ONVIF Certificate	Yes
SYSTEM	
Network Time Sync	Yes
Zero Configuration	Yes
Security	Password Protection, IP Filtering, HTTPS, SSL
NETWORK	
Max. Connections	10
Protocols	IPv4/IPv6, Manual, TCP/IP,UDP,HTTP,RTP,RTSP, NTP,DHCP,SMTP,DDNS,HTTPS,RTCP,FTP,Bonjour
NAS Support	Yes
JPEG push	Yes
DDNS	Yes (DDNS)
Remote Client	Web, Nautilus16, SmartManager
MISCELLANEOUS	
Weatherproof	IP66
PoE	802.3af Class 2
Power	PoE, DC12V, AC24V
Power Consumption	Max. 3.5W(T.B.D)
Operating Temperature	0 ~ 50°C
Humidity	0~90% RH
External Dimension	120(H)mm x 152(Ø)mm
Approvals	T.B.D