




CAUTION

RISK OF ELECTRIC SHOCK
DO NOT OPEN

CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE COVER
NOT USER SERVICEABLE PARTS INSIDE
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL

Dimensions

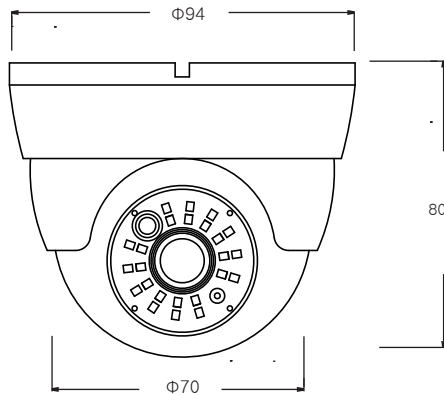


Accessories



Mount Screws


block



L-wrench


Installation

Step.1

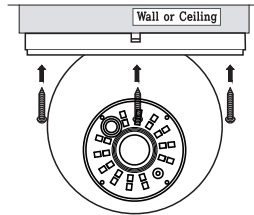


Fix the base bracket
with screws on the Wall or Ceiling

Step.2

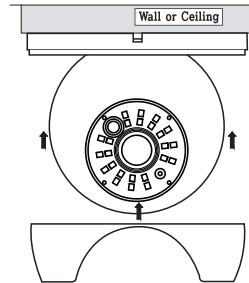

Adjust ball angle
and fix the ball base

Step.3

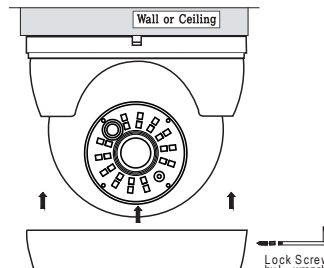

Turn fix the dome cover on
the base by hand
and lock by L-wrench

Lock Screw
by L-wrench


| PIN | SPEC | CONTACT TYPE |
|-----|-------------|---|
| 1 | TRIGGER_DVR | N.O |
| 2 | EXT_SENSOR | COM |
| 3 | SENSOR_IN | N.O : NORMAL N.C : MAGNETIC CONTACT ONLY |
| 4 | ALARM_OUT | GND |
| 5 | GND | GND |

Features

- 1/3" Sony Super HADII Color CCD (600TVL lines)
- DNR(Digital Noise Reduction)
- Keep color image even at night time
- 3.6mm Fixed lens
- PIR sensor (detecting 5mm/17ft)
- 24 White LEDs (working by PIR sensor)
- Weatherproof Vandal Dome
- DC 12V

Specifications

| Model | 70Pi Eyeball PIR | |
|-----------------------|--|-----------|
| TV System | NTSC | PAL |
| Number of Pixels | H | 768 |
| | V | 494 |
| Scanning Frequency | H | 15.734KHz |
| | V | 59.94Hz |
| Horizontal Resolution | Color : 600 TV Lines | |
| | B/W : 700 TV Lines | |
| Image Pick-UP Device | 1/3" Sony Super HADII Color CCD | |
| Scanning System | 2:1 Interlace | |
| S/N Ratio | More Than 50dB | |
| Min. Sensitivity | 0.1 Lux / 50IRE - at F : 1.4 | |
| LED | 24pcs White LED built in | |
| Gamma Correction | 0.45 Approx. | |
| Gain Control | Automatic | |
| Video Output | Composite Video 1.0Vp-p/75 | |
| Operating Temp. | -10°C ~ +50°C | |
| Operating Humidity | 30% to 90% | |
| Power Source | DC 12V | |
| Lens | Fixed Lens (3.6mm) | |
| Power Consumption | Max.1W at normal / Max. 5W at White LED on | |
| Dimensions (mm) | 94mm x 80mm(L) | |
| Cable | BNC / DC Jack Cable | |
| Weight/g | 440 | |

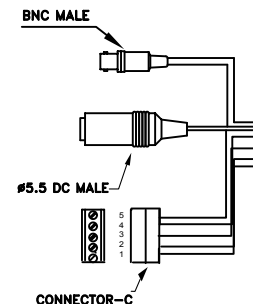

All specification and pictures are subject to change without notice to improve quality.