

# High Resolution OUTDOOR IR TURRET CAMERA

The Perfect Addition to Any CCTV System

CDT2VWP TURRET CAMERA



1-512-756-1678

» CDT2VWP features 600TV Lines resolution IR TURRET camera.




## » Key Features

- 1/3" Sony 760H SUPER HAD CCD
- 2.8-12mm Vari-Focal Lens
- True Day & Night ( ICR Filter )
- 600 TV Lines
- DIGITAL WDR
- x512 Sens-Up
- MOTION ADAPTIVE 3D Digital Noise Reduction
- 8 MOTION DETECTION
- Digital Image Stabilizer
- 12 Privacy Masking
- Various Backlight Compensation
- 42 IR LEDs
- IP66 Rating

## » Dimensions

Unit: mm

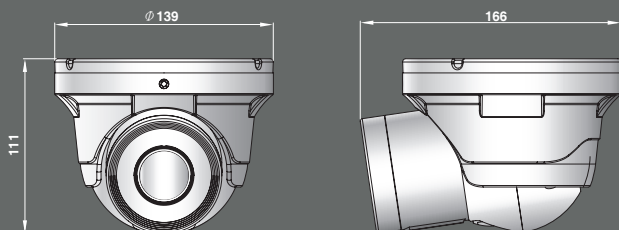

## » Technical Specification

Model	NTSC	PAL
<b>Electrical</b>		
Input Voltage	DUAL(DC12V,AC24V) ±10%	
Power Consumption	500mA Max	
Power Connector	2-Pin Terminal Block	
<b>Video</b>		
Image Device	1/3" Sony SUPER-HAD II 760H CCD	
TOTAL Pixel	811(H)x507(V)	795(H)x595(V)
Effective Pixels	768(H)x494(V)	752(H)x582(V)
Scanning System	2:1 Interlace	
Sync.System	Internal	
Scanning Freq.	15.734KHz(H),59.95Hz(V)	15.625KHz(H),50Hz(V)
Horizontal Resolution	600 TVL	
Min.illumination	0.00001Lux @ F1.2 50IRE (Sens-Up 512x)	
S/N (Y signal)	More than 52dB	
Video Output	CVBS 1.0Vp-p, 75Ω	
<b>Lens</b>		
Focal Length	2.8 - 11mm	
Lens Type	Vari Focal	
Mount Type	Board Type	
<b>Operational</b>		
Image Enhancement	DIGITAL WDR	
Day & Night	True D&N ( IR cut Filter )	
White Balance	ATW/Outdoor/Indoor/Manual/AWC	
Electronic Shutter Speed	1/60~1/10,000	1/50~1/10,000
Dynamic Noise Reduction	MOTION ADAPTIVE 3DNR	
Sens-up	x512	
Backlight Compensation	BLC/HLC/OFF	
Motion Detection	OFF/ON ( 8 area )	
Digital Image Stabilizer	OFF/ON	
Privacy Masking	12 Zone	
Digital Zoom	16x	
Digital Image Effect	FLIP,MIRROR	
<b>Environmental</b>		
Operating Temperature	-10 °C ~ +50 °C	
Operating Humidity	20 ~ 80% RH	
Storage Temperature	-20 °C ~ +60 °C	
Storage Humidity	20 ~ 90% RH	
Ingress Protection	IP66	
IR LEDs	42 IR LEDs	
<b>Mechanical</b>		
Dimension (WxHxD)	139mm(W)x111mm(H)x140mm(D)	
Weight	1400g	
Approvals	FCC (Class A), UL Listed	CE(Class A) Listed