

Ultra High Resolution ADVANCED FULL HD NETWORK CAMERA

The Perfect Addition to Any CCTV System

CVD9VIP FIXED VANDAL-PROOF CAMERA



1-512-756-1678

» The CVD9VIP network cameras offer advanced IP features and performance with Full-HD resolution real-time H.264 .





» Key Features

- Full-HD 1080p Resolution Supported
- WDR Supported
- 3DNR (3 Dimensional Noise Reduction)
- Day & Night (IR Cut Filter)
- ONVIF Supported
- BLC (Back Light Compensation)
- HSBLC (Highlight Suppression BLC)
- DIS (Digital Image Stabilization)
- Two-way Audio
- Micro SD Supported
- Dual Compression (H.264, MJPEG)
- Multiple Streaming
- Cross Web-Browsing
- Motion Adaptive Transmission
- Dynamic Adjustable Bit Rate
- Event Buffering
- FTP Image Upload
- Web Casting
- Password Protection, IP Filtering
- DDNS Supported
- Auto Exposure (AE)
- Auto White Balance (AWB)
- Privacy Masking
- Pre-recorded Voice Alert
- IP66

» Dimensions

Unit: mm

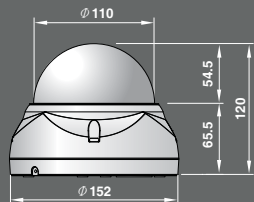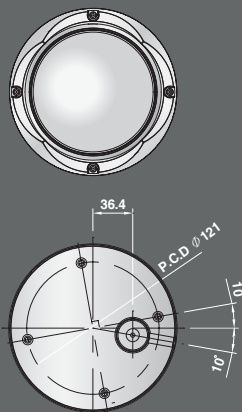

» Technical Specification

Model	CVD9VIP
IMAGE	
Image Sensor	1/2.8" CMOS
Lens	Megapixel 3~9mm Vari-focal F1.2(Tamron)
Scanning Mode	Progressive Scan
Min. Illumination	Color: 2.4Lux, B/W: 0.2Lux(F1.2, 50IRE) Color:0.09Lux, B/W:0.02Lux(Sens-up 64x)
AE/AWB	Yes
DNR	3DNR
D&N	True D&N (IR-cut filter)
WDR	Yes(68dB)
DIS	Yes
BLC	BLC, HSBLC
VIDEO	
Video Out	1 BNC
Progressive Encoding	Yes
Compression	H.264(BP/MP/HP), MJPEG
Resolution Supported	1080p, 720p, D1, VGA, QVGA
Frame Rate	30fps@H.264 1920x1080p + 30fps@H.264 320x240 + 30fps@H.264 320x240 + 30fps@JPEG 320x240
Multiple Streaming	Max.4 Multiple stream (3x H.264 and 1x MJPEG)
IN/OUT	
Audio In/Out	In x 1/Out x 1 (G.711)
Alarm In/Out	In x 2 /Out x 1
RS485	No
Ethernet	10/100Mbps
Local Storage	Micro SD
FEATURE	
Motion Detection	Yes(Max.12 Areas)
Event Buffering (Pre & Post)	Yes (2s/60s)
Privacy Masking	Yes (12 windows)
PrVA(Pre-recorded Voice Alert)	Yes (3 files)
Video Analytics	No
Cross Web Browser	Safari, Firefox, Google Chrome
FTP Image Upload	Yes
ONVIF Certificate	Yes
SYSTEM	
Network Time Sync	Yes
Zero Configuration	Yes
Security	Password Protection, IP Filtering, HTTPS, SSL
NETWORK	
Max. Connections	10
Protocols	IPv4/IPv6, Manual, TCP/IP, UDP, HTTP, RTP, RTSP, NTP, DHCP, SMTP, DDNS, HTTPS, RTCP, FTP, SNMP, Bonjour
NAS Support	Yes
JPEG push	Yes
DDNS	Yes (DDNS)
Remote Client	Web, Nautilus16, SmartManager
MISCELLANEOUS	
Weatherproof	IP66
PoE	802.3af Class 2
Power	PoE , DC12V, AC24V
Power Consumption	MAX. 6W
Operating Temperature	-10℃ ~ +50℃
Humidity	0~90% RH
External Dimension	120(H)mm x 154(Ø)mm
Approvals	T.B.D