

High Resolution COVERT(HEIGHT STRIP)


The Perfect Addition to Any CCTV System

CVTHGTIP SPECIALTY CAMERA



1-512-756-1678

- » The network cameras offer advanced IP features and performance with Full-HD resolution real-time H.264 .

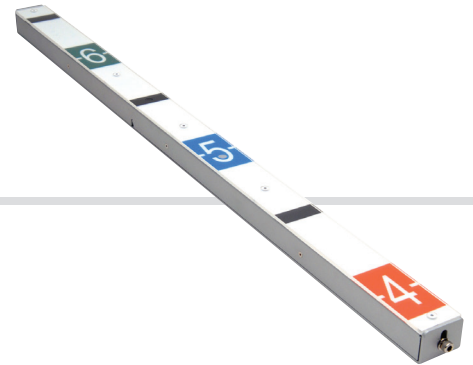


» Key Features

- Full-HD 1080p Resolution Supported
- 2DNR(2 Dimensional Noise Reduction)
- ONVIF Supported
- BLC(Back Light Compensation)
- Micro SD Supported
- Multiple Compression
- Triple Streaming
- Cross Web-Browsing
- Motion Adaptive Transmission
- Dynamic Adjustable Bit Rate
- Event Buffering
- FTP Image Upload
- Web Casting
- Password Protection, IP Filtering
- DDNS Supported
- Auto Exposure (AE)
- Auto White Balance (AWB)
- Privacy Masking

» Dimensions

Unit: mm

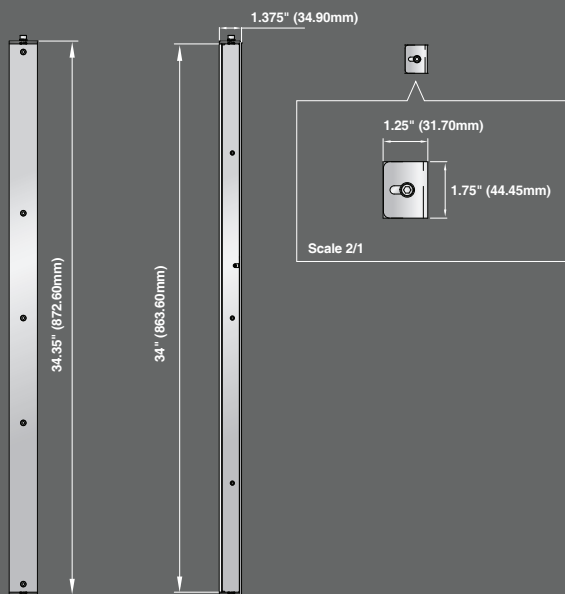

» Technical Specification

Model	CVTHGTIP
IMAGE	
Image Sensor	1/2.8" Exmor CMOS
Lens	Megapixel Fixed Pin Hole 4.3mm F2.0
Scanning Mode	Progressive Scan
Min. Illumination	Color: 2.5Lux(F2.0, 50IRE) : T.B.D
AE/AWB	Yes
DNR	Yes
D&N	No
WDR	ART-EX (D-WDR)
DIS	No
BLC	BLC
Built-in IR	No
Remote-Focus	No
VIDEO	
Video Out	No
Progressive Encoding	Yes
Compression	H.264(BP/MP/HP), MPEG4(SP), MJPEG
Resolution Supported	1080p, 720p, D1, VGA, QVGA
Frame Rate	30fps @ H.264 1080p + 5fps @ MJPEG QVGA 25fps @ H.264 1080p + 30fps @ MJPEG VGA 30fps @ H.264 720p + 30fps @ MJPEG 720p
Multiple Streaming	Triple Streaming
IN/OUT	
Audio In/Out	No
Alarm In/Out	Terminal, 1 TTL input
RS485	No
Ethernet	10/100Mbps
Local Storage	Micro SD
FEATURE	
Motion Detection	Yes (Total 16 Include/Exclude windows)
Event Buffering (Pre & Post)	Yes
Privacy Masking	Yes
PrVA(Pre-recorded Voice Alert)	Yes(3files)
Video Analytics	No
Cross Web Browser	Yes
FTP Image Upload	Yes
ONVIF Certificate	Yes
Easy Remocon	No
SYSTEM	
Network Time Sync	Yes
Zero Configuration	Yes
Security	Password Protection, IP Filtering, HTTPS, SSL
NETWORK	
Max. Connections	10
Protocols	IPv4/IPv6, Manual, TCP/IP,UDP,HTTP,RTP,RTSP,NTP, DHCP,SMTP,DDNS,HTTPS,RTCP,FTP,SNMP,Bonjour
NAS Support	Yes
JPEG push	Yes
DDNS	Yes (DDNS)
Remote Client	Web, NC-Titanium, SmartManager
MISCELLANEOUS	
Weatherproof	No
PoE	802.3af Class 2
Wi-Fi	No
Power	PoE/DC12V
Power Consumption	4.0W
Operating Temperature	-10° C~ + 50° C
Humidity	0~90% RH
External Dimension	44.45(W) x 161.4(H) x 34.9(D) mm
Approvals	FCC, CE, UL, MIC