

# Keyboard Controller

## Smart Dynamic Keyboard

The Perfect Addition to Any CCTV System

**KBC1** Keyboard Controller

- » The New KBC1 PTZ Keyboard is designed to handle surveillance systems/grids of up to 508 PTZ dome cameras, DVRs and MATRIX SWITCHERS with simple yet precise movements. This stylish keyboard utilizes the jog dial feature as well as a 3 axis joystick to allow the operator to handle the DVR and PTZ cameras with ease.




### » Key Features

- Jog Dial for Smoother Control of DVR
- Recalls up to 508 Cameras from One Keyboard
- 3-Axis Joystick Control of PTZ Functions
- Excellent System Compatibility with Multiple Protocols
- Stylish Design

### » Dimensions

Unit: mm

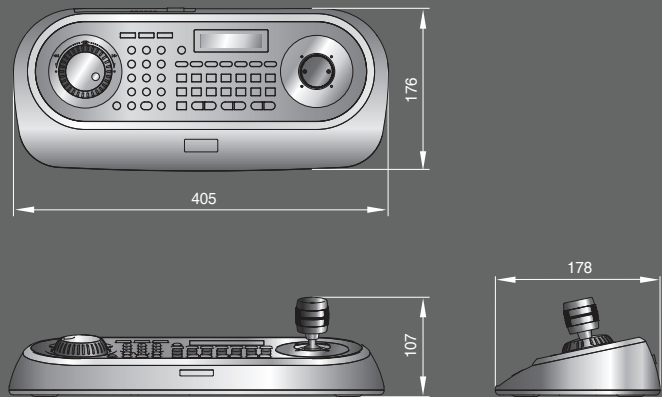

### » Technical Specification

Model	KBC1
<b>Communication</b>	
Interface	RS-485/232
Data Port	Dome 1/2 (Terminal Block), Data 1/2 (RJ45), RS-232
Baud Rate	2,400 ~ 38,400 bps
Control Unit	127 Dome Cameras
Protocol	Pelco-P/D, F II, F IIE
<b>Operational</b>	
LCD Display	16 x 2 Line LCD
Joystick	3 Axis twist zoom
Jog Shuttle	DVR playback control
On Screen Display	English
<b>Environmental</b>	
Operating Temperature	0°C ~ 50°C
Operating Humidity	0 ~ 90% (Non-condensing)
<b>Electrical</b>	
Input Voltage / Current	12 VDC
Powr Consumption	6W
<b>Mechanical</b>	
Dimension ( WxHxD )	405 x 176 x 107 mm (15.9" x 6.9" x 4.2")
Weight	1.2Kg